

C75

Build No. 20180105

PROFILE

Centerm **zero client** C75 is a specialized solution for accessing **Windows MultiPoint Server™**, **Userful MultiSeat™ Linux and Monitors Anywhere**, which offers **good performance at a low cost**. Without local operating system and storage, C75 presents server desktop and applications perfectly to the users once it is powered on and connected to the server.

FEATURES

> Specialized zero client

Excellent accessing device specially designed for Windows MultiPoint Server ™, Userful MultiSeat™ Linux and Monitors anywhere.

Low Cost Solution

Low price, low power consumption and no maintenance guarantee the low cost.

High Performance

Full-HD multimedia and good quality voice supported

Compact, Flexible & secure

Small size, fan-less design, VESA mountable, anti-theft kensington lock.

> Environment friendly

Low CO2 emission, low heat emission, noise-free and space saving
















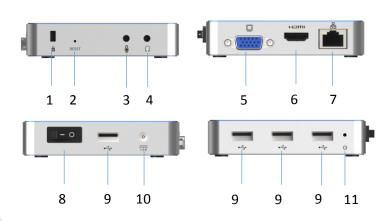

- 1. Kensington Lock
- 2. Reset
- 3. Mic-in
- 4. Line-out
- 5. VGA Port
- 6. HDMI Port
- 7. LAN Port
- 8. Power Switch
- 9. USB Port
- 10. DC Port
- 11. LED Light

SPECIFICATION



Chipset SoC Available Operating System N/A Server OS Support Windows Multipoint Server 2012, Userful Multiseat Linux, Monitors Anywhere STORAGE Storage N/A GRAPHIC Port VGA x 1 (Dsub - 15), HDMI x 1 Resolution 2048x1152@60Hz (VGA) 1920X1080@60Hz (HDMI) NETWORK LAN x 1 (10/100/1000 Base-T Fast Ethernet, RJ-45) VO PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 50/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot EnVIRONMENT	SYSTEM	
Server OS Support Windows Multipoint Server 2012, Userful Multiseat Linux, Monitors Anywhere	Chipset	SoC
Linux, Monitors Anywhere	Available Operating System	N/A
Storage N/A GRAPHIC Port VGA x 1 (Dsub -15), HDMI x 1 Resolution 2048x1152@60Hz (VGA) 1920X1080@60Hz (HDMI) NETWORK LAN x1 (10/100/1000 Base-T Fast Ethernet, RJ-45) VO PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Server OS Support	<u>.</u>
GRAPHIC Port VGA x 1 (Dsub - 15), HDMI x 1 Resolution 2048x1152@60Hz (VGA) 1920X1080@60Hz (HDMI) NETWORK LAN x 1 (10/100/1000 Base-T Fast Ethernet, RJ-45) VO PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	STORAGE	
Port VGA x 1 (Dsub - 15), HDMI x 1 Resolution 2048x1152@60Hz (VGA) 1920X1080@60Hz (HDMI) NETWORK LAN x1 (10/100/1000 Base-T Fast Ethernet, RJ-45) I/O PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Storage	N/A
Resolution 2048x1152@60Hz (VGA) 1920X1080@60Hz (HDMI) NETWORK LAN x1 (10/100/1000 Base-T Fast Ethernet, RJ-45) I/O PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Device Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	GRAPHIC	
NETWORK LAN x1 (10/100/1000 Base-T Fast Ethernet, RJ-45) I/O PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Fan-less Convection Operation Temperature 0°C to 40°C	Port	VGA x 1 (Dsub -15), HDMI x 1
LAN x1 (10/100/1000 Base-T Fast Ethernet, RJ-45) I/O PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 50//3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Resolution	
VO PERIPHERAL INTERFACE USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Operation Temperature 0°C to 40°C	NETWORK	
USB 2.0 x 4 RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 50//3A DC Power Consumption 3.3w MOUNTING VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Fan-less Convection Cooling Fan-less Convection Operation Temperature 0°C to 40°C	LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
RJ-45 x 1 AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	I/O PERIPHERAL INTERFACE	
AUDIO Ports Line-out x 1 , Mic-in x 1, (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	USB 2.0	x 4
Ports Line-out x 1 , Mic-in x 1 , (1/8-inch mini jack) DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	RJ-45	x 1
DIMENSION Device (H x W x D), 93.5mm x 93.5mm x 20.4mm Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	AUDIO	
Device (H x W x D), Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Ports	Line-out x 1, Mic-in x 1, (1/8-inch mini jack)
Packaging 0.63kg Net Weight 0.2kg POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	DIMENSION	
Net Weight POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Device (H x W x D),	93.5mm x 93.5mm x 20.4mm
POWER Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Packaging	0.63kg
Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC Power Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Net Weight	0.2kg
Fower Consumption 3.3w MOUNTING VESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature	POWER	
WESA Bracket VESA Mounting Kit Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Adapter	
VESA Bracket Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature O°C to 40°C	Power Consumption	3.3w
Kensington Lock Built-in Kensington Lock Slot ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	MOUNTING	
ENVIRONMENT Cooling Fan-less Convection Operation Temperature 0°C to 40°C	VESA Bracket	VESA Mounting Kit
Cooling Fan-less Convection Operation Temperature 0°C to 40°C	Kensington Lock	Built-in Kensington Lock Slot
Operation Temperature 0°C to 40°C	ENVIRONMENT	
·	Cooling	Fan-less Convection
Relative Humidity 30% to 90% non-condensing	Operation Temperature	0°C to 40°C
	Relative Humidity	30% to 90% non-condensing

© 2018 Fujian Centerm Co., LTD. The information contained herein is subject to change without notice. Centerm shall not be liable for technical or editorial errors or omissions contained herein.

Website: <u>www.centerm.com</u> E-mail: ctsales@centerm.com