

C91 (V2)

PROFILE

Centerm C91(V2) is a specially designed cloud client based on ARM-based processor. Built with new COS software, Citrix HDX protocol is available on C91(V2) now.

FEATURES

➤ **Cost-effective**

Entry-level price, professional experience. Equipped with high-performance processor, support multi-format 1080P video codec, it brings customers powerful computing and visual experience in virtualization scenarios.

➤ **Enhanced Peripherals Applications**

Combined with self-developed patents software SEP, it solves problems using USB peripherals in VDI / HSD environment.

➤ **Convenient Management**


By CCCM management software, you can achieve rapid deployment of cloud client. Through centralized management, unified deployment and distribution of software to help IT administrators significantly reduce maintenance work.

➤ **Environment friendly**

Low CO2 emission, low heat emission, noise-free and space saving.




Connectivity

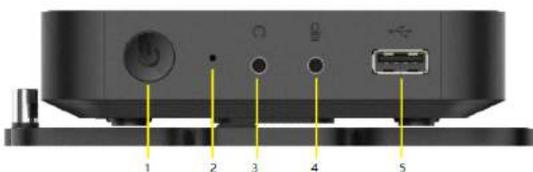

1. Power button
2. Power indicator light
3. Line-out
4. Mic-in
5. USB 2.0 Port

6. D-Sub(VGA) port
7. HDMI port
8. RJ-45

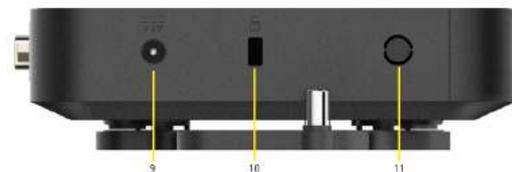

9. +5V DC power input
10. Kensington lock slot
11. WIFI antenna port

12. USB 2.0 Ports

SPECIFICATION

| SYSTEM | |
|----------------------------|--|
| Processor | ARM Cortex A9 Quad-Core 1.6GHz |
| Available Operating System | COS ① |
| VDI/HSD Support | Citrix Receiver / Microsoft RDP 8.1 Compatible |
| Management | CCCM |
| MEMORY | |
| RAM (DDR3) | 1GB (Onboard) |
| Storage (eMMC) | 4GB (Onboard) |
| DISPLAY | |
| Port | VGA x 1 , HDMI x 1 |
| Resolution | 1920 x 1080 @ 60Hz |
| Color Depth | 32 bits |
| Dual Display | N/A |
| NETWORK | |
| LAN | x1 (10/100 Mbps Base-T Fast Ethernet, RJ-45) |
| WLAN | Optional built-in USB 802.11 b/g/n wireless |
| I/O PERIPHERAL INTERFACE | |
| USB 2.0 | x 4 (front x 1, side x 3) |
| RJ-45 | x 1 |
| AUDIO | |
| Ports | Front: Line-out x 1 , Mic-in x 1 (1/8-inch mini jack) |
| DIMENSION | |
| Device | 110mm x 110mm x 27mm (Without mounting kit) |
| Net Weight | 0.174 kg |
| POWER | |
| Adapter | Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC |
| Power Consumption | < 6.1 w |
| MOUNTING | |
| VESA Bracket | VESA mounting kit |
| Kensington Lock | Built-in Kensington security slot |
| ENVIRONMENT | |
| Cooling | Fan-less Convection |
| Operation Temperature | 0°C to 40°C |
| Relative Humidity | 30% to 90% non-condensing |

①: Centerm Operating System (Linux).