

D660

PROFILE

D660 is a cost efficient and energy saving alternative to PCs, which delivers rich multimedia capabilities and PC-like user experience.

FEATURES

➤ Cost-effective

Low price and high performance with intel CPU

➤ Low power consumption

A green product with low power consumption and low CO2 emission

➤ Multiple interfaces


4 serial port, 1 parallel port, 2 USB 3.0 port, 4 USB 2.0 port, 1 DVI-I port

➤ Multiple VDI protocol supported

Widely support Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.



Connectivity

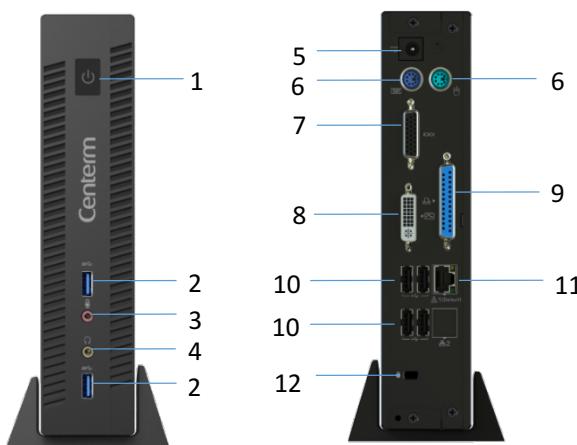

1. Power button
2. USB 3.0 Port
3. Mic-in
4. Line-out
5. DC 19V input
6. SePS/2 Ports
7. Serial Port
8. DVI-I Port
9. Parallel Port
10. USB 2.0 Port
11. RJ-45
12. Kensington Lock Slot

SPECIFICATION

Centerm

| SYSTEM | |
|------------------------------|---|
| Processor | Intel i3-4170 dual core 3.7GHz or Intel i5-4570s quad core 2.9GHz |
| Available Operating System | WES7 / WES8 / Win 10 IOT |
| VDI/HSD Support | Citrix Receiver / VMware View Client / Microsoft RDP 8 |
| Management | CCCM |
| MEMORY | |
| RAM (DDR3) | 4GB (Max up to 16GB) |
| Storage (Hard Disk) | 500GB (up to 1TB), optional 8GB SSD (up to 128GB) Support dual-storage configuration. |
| DISPLAY | |
| DVI | x 1 (VGA Convertor included) |
| DP | Optional |
| Resolution | 1920x1200 (DVI) 3840 X2160(DVI to HDMI) |
| Color Depth | 32 bits |
| NETWORK | |
| LAN | x1 (10/100/1000 Base-T Fast Ethernet, RJ-45) x1 optional (10/100/1000 Base-T Fast Ethernet, RJ-45) |
| WLAN | Optional Mini PCI-E wireless |
| I/O PERIPHERAL INTERFACE | |
| USB 2.0 | x 4 rear |
| USB 3.0 | x 2 front |
| Serial Port | x 1 (extensible to 4 via cable) |
| Parallel port | x 1 |
| PS/2 | x 2 |
| AUDIO | |
| Ports | Line-out x 1 , Mic-in x 1 |
| DIMENSION | |
| Device (including the stand) | 206mm x 83mm x 223mm |
| Packaging | 483mm x 286mm x 115mm |
| Net Weight | 1.54 kg |
| POWER | |
| Adapter | Worldwide auto-sensing 100-240V AC, 50/60 Hz, 19V/4.74A DC |
| Power Consumption | Desktop mode: 15.276w, Full-load mode: 37.316w |
| MOUNTING | |
| Stand | Vertical feet standard |
| Kensington Lock | Built-in Kensington lock slot |
| ENVIRONMENT | |
| Cooling | Fan convection |
| Operation Temperature | 0°C to 40°C |
| Relative Humidity | 30% to 90% non-condensing |

© 2017 Fujian Centerm Co., LTD. The information contained herein is subject to change without notice. Centerm shall not be liable for technical or editorial errors or omissions contained herein.

Website: www.centerm.com

e-mail: ctsales@centerm.com